


FLARED CONCRETE DRIVEWAY APPROACH WITH CONCRETE WALK

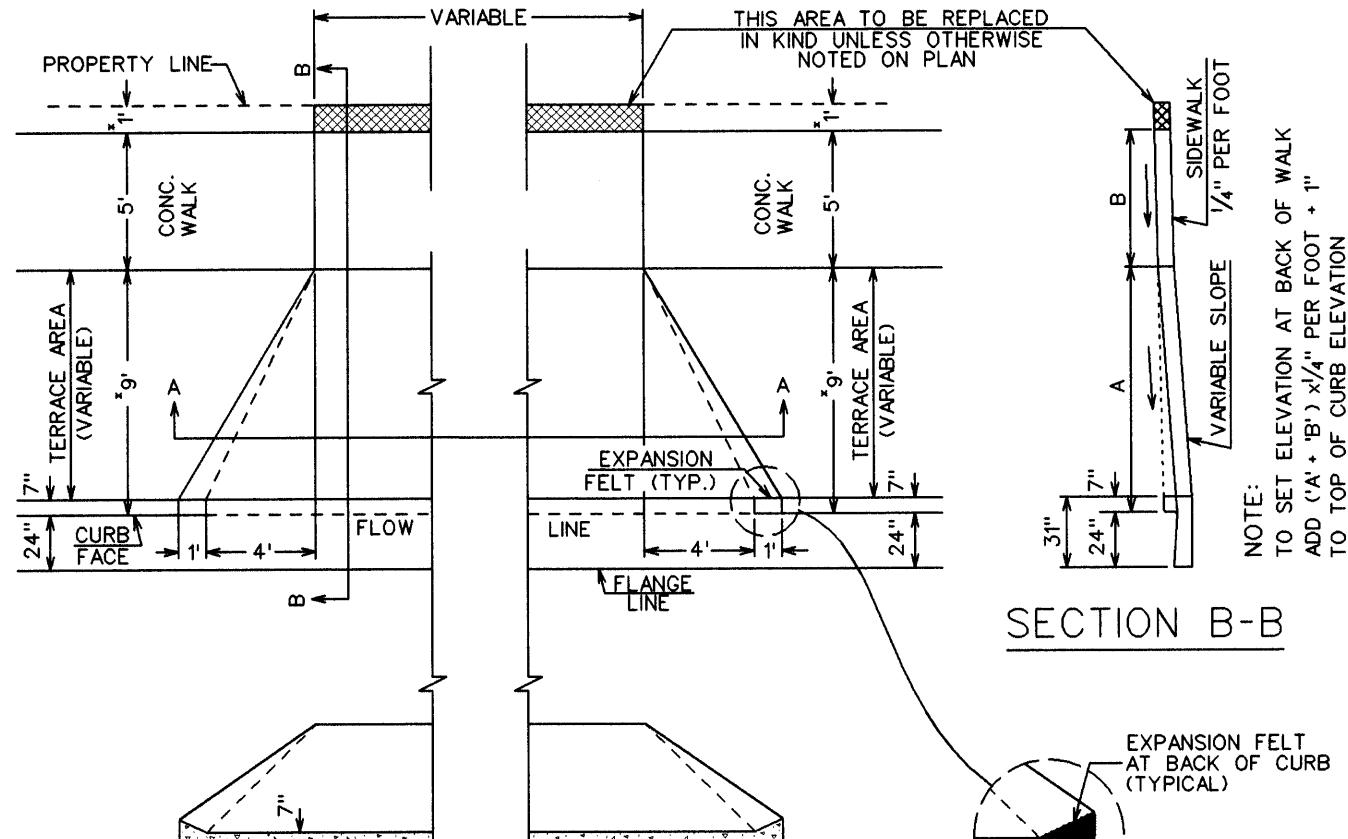

SECTION A-A

(NOT TO SCALE)

NOTES


PERMIT IS REQUIRED

MAXIMUM DRIVEWAY WIDTH IS 30 FEET
MINIMUM DRIVEWAY WIDTH IS 12 FEET
(AT PROPERTY LINE, NOT INCLUDING FLARES)

PLACE DUMMY JOINT AT CENTER OF
DRIVEWAY OVER 14 FEET IN WIDTH
AND/OR AT ALL JOINTS IN THE GUTTER

IF CURB & GUTTER SECTION TO BE REMOVED
IS LESS THAN 5 FEET FROM EXISTING JOINT,
THEN ALL CURB & GUTTER MUST BE REMOVED
AND REPOURED UP TO JOINT.

* DIMENSIONS MARKED WITH * ARE FOR
30 FOOT PAVEMENT (FACE TO FACE) IN
A 60 FOOT WIDE RIGHT-OF-WAY. FOR
OTHER CONDITIONS PLEASE CONTACT THE
DEPARTMENT OF PUBLIC WORKS.

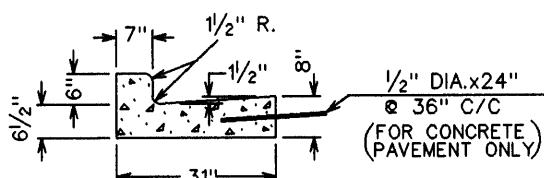

STANDARD
CURB & GUTTER

GREENFIELD DEPARTMENT OF NEIGHBORHOOD SERVICES PUBLIC WORKS DIVISION 4551 SOUTH 52nd STREET GREENFIELD, WI 53220 (414)-761-5376		ENGINEERING DIVISION 7325 W. FOREST HOME AVE. GREENFIELD, WI 53220 (414)-329-5325
---	--	--